




CONTACT ARRANGEMENT




Pos 1
OFF



Pos 2
EXIT




Pos 3
AUTO



Pos 4
HOLD-OPEN

ARROW INDICATES CONTACT CLOSURE

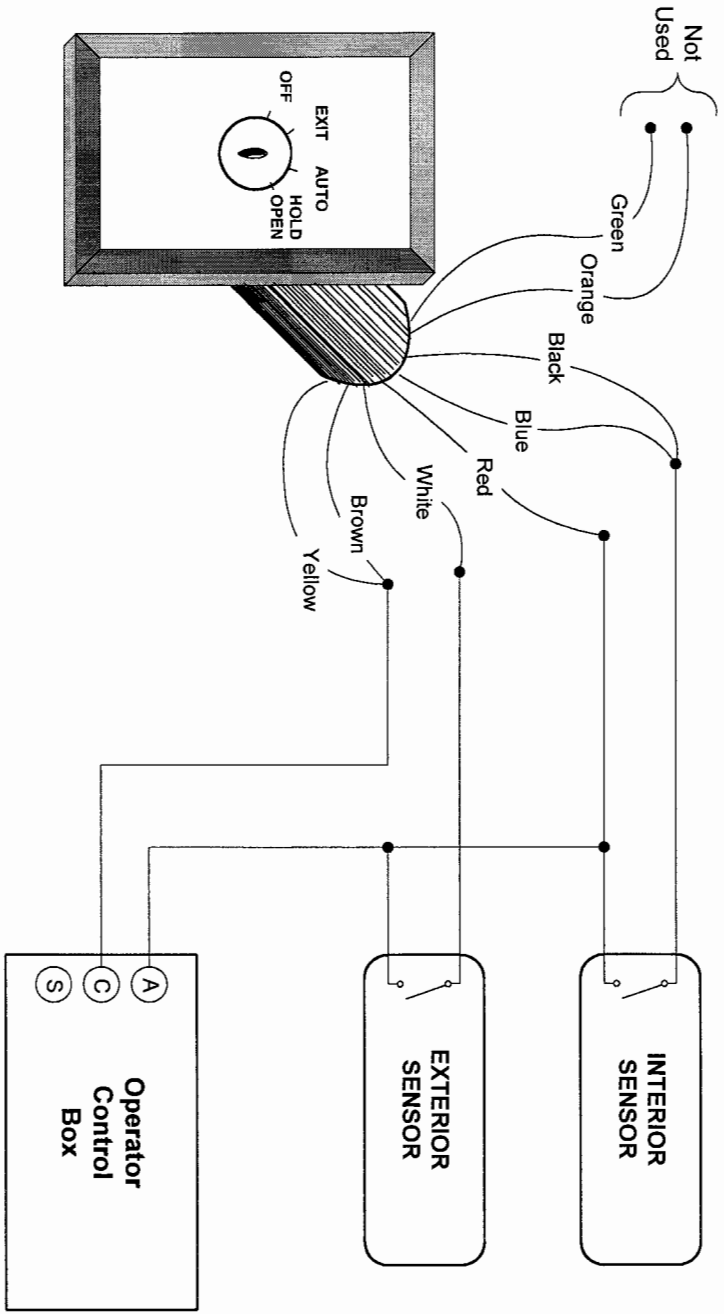

TYPICAL WIRING DIAGRAM
AUTOMATIC SLIDING DOOR
WITH ONE-WAY FEATURE

SPECIFICATIONS

- Contact Rating : 4 amps @ 125VAC
- 4 Tumbler Lock
- All locks keyed alike
- Key removable in all positions
- Switch Depth: 1 1/4"
- Frame hole diameter: 1 1/8" min.

		Camden Door Controls		5151 Everest Dr. Unit 6 Mississauga, Ontario L4W 2Z3	
SCALE: NONE	DRAWN BY: DGW	DATE: 05/16/03	REVISED:		
Four Position Keyswitch (CM-160/170/180 -4)					
DRAWING No: 40-82B020		FILENAME: CM_160_4.vsd			