
CX-ED1579L 'All In One' Fire Rated Electric Strike










monitor included.

Camden CX-ED1579L strikes are UL security and 3-hour fire rated, non-handed, and compatible with most mortise and cylindrical locksets. In addition, they feature adjustable latch monitor placement and easy-fit wiring connectors for power and monitoring.

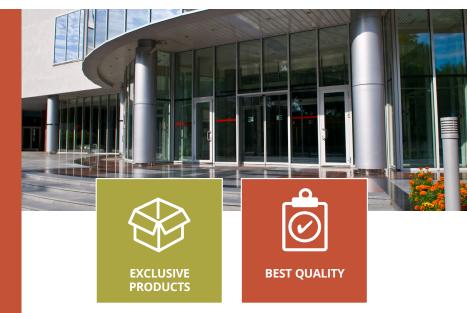

Features

- For mortise and cylindrical locksets
- 3/4" (19mm) latch projection (throw)
- 6 stainless steel faceplates included
- Faceplates also available in black architectural finish (BHMA 622, US19)
- Selectable fail safe/fail secure operation
- Selectable 12/24V AC/DC
- Built-in latch monitoring
- Non-handed, LH/LR
- Easy fit connectors for power and monitoring wires
- Stainless steel strike body
- 5 year warranty

SPECIFICATIONS

Voltage: 12/24V AC/DC

Current Draw: 260mA @12V AC/DC

150mA @24V AC/DC

Static Strength: 1,500 lbs. Dynamic Strength: 70 ft-lbs.

Mode: Field Selectable Fail Safe or Fail Secure

Operation: AC Buzz, DC Silent
Duty: Continuous (DC)
Mounting: Non-handed

Endurance: 1,500,000 Cycles (Factory Tested)

250,000 Cycles (UL Verified)


Fire Rating: UL10C/CAN4-S104 3hrs.

(Fail Secure Mode Only)

Latch Bolt Monitor: SPDT, 100mA @ 24V DC

Dimensions: 4-7/8"L x 1-1/4"W x 1-3/4"D

(124mm x 32mm x 45mm)

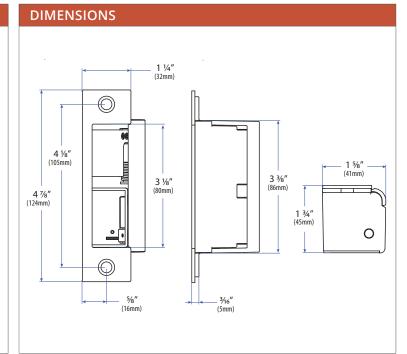

ORDERING INFORMATION MODEL CX-ED1579L Grade 1 'all in one' fire rated strike, 12/24V AC/DC, For mortise and cylindrical locksets. Includes: CX-EMP-1, CX-EMP-2, CX-EMP-3, CX-EMP-4, CX-EMP-5 Grade 1 'all in one' fire rated strike, 12/24V AC/DC, For mortise and cylindrical locksets. Includes: CX-EMP-1-BK, CX-EMP-2-BK, CX-EMP-3-BK, CX-EMP-3-BK, CX-EMP-5-BK

