

CX-EPD1289L

3/4" Surface Mount Preload RIM Strike



UL10C/
CAN4-S104,
3hr. Fire rating



CX-EPD1289L

CX-EPD1289L-BK

The CX-EPD1289L Series Grade 1 RIM Strike with Preload offers 'Universal' design that delivers unsurpassed application flexibility, with UL1034, 294, ANSI/BHMA A156.31 listings. Latch monitoring included.

The patented design enables it to operate with up to 15 pounds of preload pressure, for superior performance under the most demanding conditions. Registered under U.S. Patent 10,988,959 and Canadian Patent 3241820.



EXCLUSIVE
PRODUCTS





BEST QUALITY

Features

- 'No Cut' surface mount RIM strike for Pullman latches
- Operates with up to 15 lbs. of preload pressure
 - US Patent: 10988959
- 'Universal' design with selectable:
 - 12/24V, AC/DC operation
 - Fail safe/fail secure operation
- 3/4" latch projection
- Latches operate independently of each other
- Metal mounting jig included for easy installation
- Available in stainless steel and unique all-black finish
- Heavy duty stainless steel construction
- Surface mounting box and spacer plates available
- Horizontal adjustment
- Removable latch monitoring switch included
- Non-handed, left or right
- ANSI/BHMA A156.31, Grade 1 certified
- Windstorm resistant ANSI/SDI A250.13
- 5 year warranty

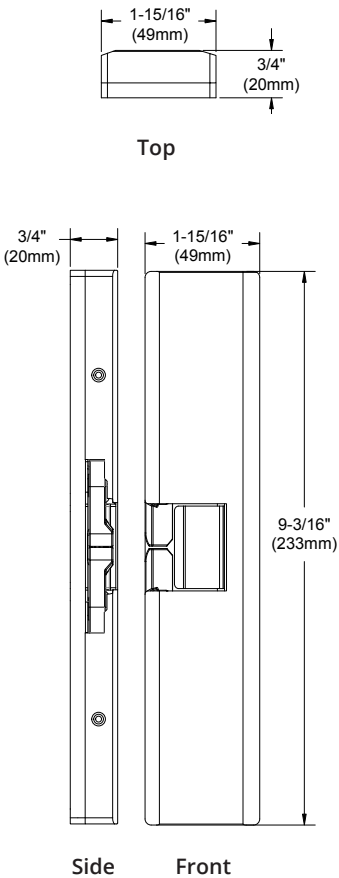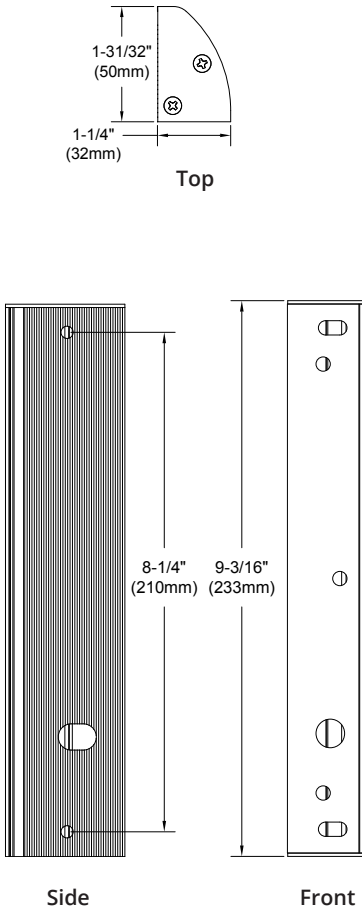

SPECIFICATIONS		DIMENSIONS	
Latch Projection:	3/4"	CX-EPD1289L - Strike	CX-RIM-SB - Mounting Box
Voltage:	12/24V AC/DC		
Current Draw:	560mA @12V DC 280mA @24V DC		
Static Strength:	1,500 lbs (UL Verified)		
Dynamic Strength:	70 ft-lbs		
Preload:	15 lbs		
Endurance:	1,000,000 Cycles (Factory Tested) 500,000 Cycles (UL Verified)		
Fire Rating:	UL10C/CAN4-S104 3hrs. (Fail Secure Mode Only)		
Mode:	Field Selectable Fail Safe or Fail Secure		
Operation:	AC Buzz, DC Silent		
Duty:	Continuous		
Latch Monitor:	SPDT, 100mA @ 24V DC, Resistive		
Dimensions:	CX-EPD1289L: 9-3/16"H x 1-15/16"W x 3/4"D (233mm x 49mm x 20mm) CX-RIM-SB: 9-3/16"H x 1-31/32"W x 1-1/4"D (233mm x 50mm x 32mm)		
BHMA:	Grade 1 Certified, BHMA/ANSI A156.31		
Windstorm Resistance:	ANSI/SDI A250.13 Also Certified to ASTM E330, ASTM E1886, ASTM E1996, TAS 210, TAS 202, and/or TAS 203		

ORDERING INFORMATION	
MODELS	
CX-EPD1289L	Surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, c/w 'plug-in' latch monitor assembly and metal mounting jig.
CX-EPD1289L-BK	All-black finish, surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, c/w 'plug-in' latch monitor assembly and metal mounting jig.
SPACER PLATE	
CX-EPD1289-SPC	Spacer plate for CX-EPD1289L surface mount RIM strike
FILLER PLATE	
60-35E014	RIM Strike Filler Plate for use with Hager and SDC Exit Devices
SURFACE MOUNTING BOX	
CX-RIM-SB	Aluminum adapter box for surface mounting CX-EPD1289L on the inactive leaf of a double door
CX-RIM-SB-BK	Aluminum adapter box for surface mounting CX-EPD1289L on the inactive leaf of a double door, all black finish