



## CX-EPD1299L

### 1/2" Surface Mount RIM Strike with Preload



The CX-EPD1299L Series Grade 1 RIM Strike with Preload offers 'Universal' design that delivers unsurpassed application flexibility, with UL1034, 294, ANSI/BHMA A156.31 listings. Latch monitoring included. The patented design of this new 1/2" RIM strike enables it to operate with up to 15 pounds of preload pressure for superior performance under the most demanding conditions. This industry-leading strike design is registered under U.S. Patent 10,988,959 and Canadian Patent 3241820.

For added flexibility, 1/8" and 1/4" spacer plates are included with the strike, as well as a convenient metal mounting jig. And, like all Camden strikes, the CX-EPD1299L is backed by Camden's exclusive five-year, no-hassle product warranty.



#### Features

- 'No Cut' surface mount RIM strike for Pullman latches
- Operates with up to 15 lbs. of preload pressure
  - US Patent: 10988959
- 'Universal' design with selectable:
  - 12/24V, AC/DC operation
  - Fail Safe/Fail Secure operation
- 1/2" latch projection
- Latches operate independently of each other
- Metal mounting jig included for easy installation
- Available in stainless steel and unique all-black finish
- Heavy duty stainless steel construction
- Horizontal adjustment, spacer plate available
- Removable latch monitoring switch included
- Non-handed, left or right
- ANSI/BHMA A156.31, Grade 1 certified
- 5 year warranty




## SPECIFICATIONS


<b>Latch Projection:</b>	1/2" - 3/4" with 1/8" or 1/4" Spacer Plates
<b>Voltage:</b>	12/24V AC/D
<b>Current Draw:</b>	560mA @12V DC 280mA @24V DC
<b>Static Strength:</b>	1,500 lbs. (UL Verified)
<b>Dynamic Strength:</b>	70 ft-lbs.
<b>Preload:</b>	15 lbs.
<b>Endurance:</b>	1,000,000 Cycles (Factory Tested) 500,000 Cycles (UL Verified)
<b>Mode:</b>	Field Selectable Fail Safe or Fail Secure
<b>Operation:</b>	AC Buzz, DC Silent
<b>Duty:</b>	Continuous
<b>Latch Monitor:</b>	SPDT, 100mA @ 24V DC, Resistive
<b>Dimensions:</b>	<p><b>CX-EPD1299L:</b> 9-3/16"H x 1-15/16"W x 9/16"D (233mm x 49mm x 14mm)</p> <p><b>CX-RIM-SB:</b> 9-3/16"H x 1-31/32"W x 1-1/4"D (233mm x 50mm x 32mm)</p>

## DIMENSIONS

**CX-EPD1299L**

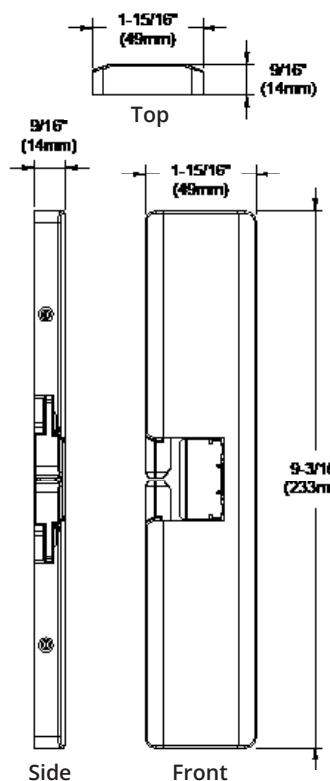

**CX-RIM-SB**

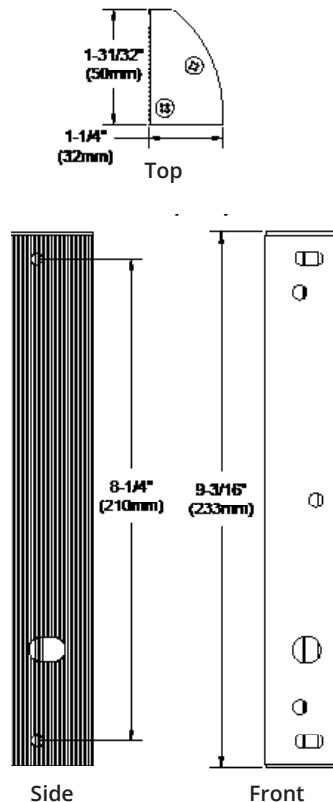

## ORDERING INFORMATION

### MODELS

<b>CX-EPD1299L</b>	1/2" surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, with 'plug-in' latch monitor assembly & metal mounting jig, 1/8" and 1/4" spacer plates included.
<b>CX-EPD1299L-BK</b>	All-black finish, 1/2" surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, with 'plug-in' latch monitor assembly & metal mounting jig, 1/8" and 1/4" spacer plates included.

### SPACER PLATE

<b>60-35E013</b>	1/8" Spacer Plate for CX-EPD1299L Electric Strike
<b>60-35E015</b>	1/4" Spacer Plate for CX-EPD1299L Electric Strike
<b>60-35E013-BK</b>	1/8" Spacer Plate for CX-EPD1299L Electric Strike, All-Black Finish
<b>60-35E015-BK</b>	1/4" Spacer Plate for CX-EPD1299L Electric Strike, All-Black Finish

### FILLER PLATE

<b>60-35E014</b>	RIM Strike Filler Plate for use with Hager and SDC Exit Devices
------------------	---

### SURFACE MOUNTING BOX

<b>CX-RIM-SB</b>	Aluminum surface mounted adapter box for mounting EPD-1289L (or 1299L) on a double door
------------------	---



Opening New Doors to Innovation, Quality, and Support!

2395 Skymark Ave, Mississauga, ON Canada L4W 4Y6 • Toll Free: 1(877) 226-3369 (CAMDEN9)  
Tel: (905) 366-3377 | Fax: (905) 366-3378 | E-mail: info@camdencontrols.com | www.camdencontrols.com



Certified ISO 9001: 2015

Part #: MKTG-LIT-SP-CX-EPD1299L

Rev5