

CV-710SL

SURFACE MOUNT ILLUMINATED WIEGAND KEYPAD



CV-710SL

FEATURES

- VANDAL RESISTANT BACKLIT METAL KEYS, FACEPLATE AND CAST ALUMINUM SURFACE BOX
- WEATHER RESISTANT IP-65 RATED
- SELECTABLE WIEGAND 26, 30, 34, 40 BIT OR CLOCK + DATA
- 12V DC OPERATION WITH LOW CURRENT DRAW
- SELECTABLE PIN CODE LENGTH
- TAMPER ALARM OUTPUT
- AUDIBLE AND VISUAL FEEDBACK
- 3 YEAR WARRANTY

DESCRIPTION

Camden Door Controls CV-710SL surface mount backlit Wiegand keypads are constructed to provide exceptional performance in high traffic/demanding applications, and support an unlimited number of users. Metal keys, faceplate and cast aluminum box are designed to withstand heavy traffic and vandalism. IP-65 rated dust and water resistance enable the keypad to be mounted outdoors. CV-710SL surface mount Wiegand keypads support selectable PIN code length and facility codes. A tamper switch alarm output is provided. There is a wide range of field selectable Wiegand outputs, providing compatibility with virtually any access control system.

APPLICATION

Camden Door Controls CV-710SL surface mount backlit Wiegand keypads are weather and vandal resistant, and are designed for heavy-duty indoor or outdoor applications. These keypads may be used as access control devices, wherever controlled entry or egress through an electrically locked door is required.

SURFACE MOUNT WIEGAND KEYPAD


ARCHITECTS/ENGINEERS SPECIFICATIONS

The surface mount Wiegand keypads used in the site/complex shall be Camden Door Controls model CV-710SL. The keypads shall be housed in a metal faceplate and enclosure, IP-65 rated against water and dust. Keys shall be metal with back lighting.

The keypads shall be Wiegand 26, 30, 34, 40 bit, and clock + data; have field selectable PIN code length, and provide audible and visual response to operation. A tamper alarm output shall be provided.

SPECIFICATIONS

INPUT VOLTAGE:	12V DC
CURRENT CONSUMPTION:	30mA
OUTPUT:	WIEGAND 26, 30, 34, 40 BIT OR CLOCK + DATA
KEYPAD LIGHTING:	BACKLIT, SELECTABLE ON OR OFF
VISUAL INDICATOR:	RED, GREEN AND ORANGE LED
AUDIBLE INDICATOR:	ONE INTERNAL BUZZER
OPERATING TEMPERATURE:	-4°F TO 122°F (-20°C TO 70°C)
OPERATING HUMIDITY:	0 TO 95% (NON-CONDENSING)
RATING:	IP-65
DIMENSIONS:	3 1/2" W x 4 3/4"H x 1 9/16" D (90mm x 120mm x 40mm)

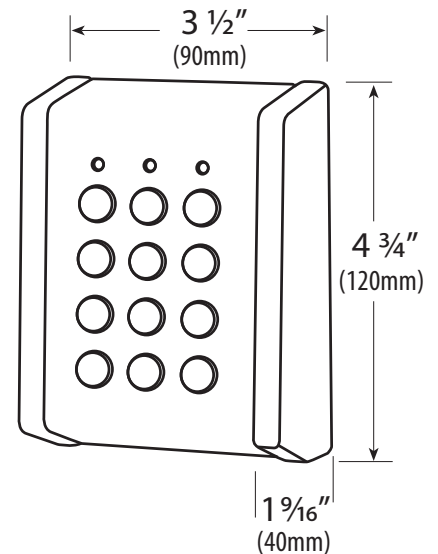

CV-710SL

ORDER INFORMATION

MODEL	DESCRIPTION
CV-710SL:	SURFACE MOUNT WIEGAND KEYPAD, WITH BACKLIT METAL KEYS AND CAST ALUMINUM MOUNTING BOX