

## CM-SR Series Receiver and Transmitters



CM-SRFM2  
Wireless Kit

CM-SR Series wireless system includes a high security stand-alone wireless receiver with one Form 'A' and one Form 'B' relay outputs. The receiver features a rugged construction with a built-in antenna for mounting indoors or outdoors.

CM-SR Series wireless systems are designed to activate locking devices, such as electric strikes and automatic gate and door operators. Ideal for one or two door access control, in retail, commercial, and healthcare facilities. The rugged IP65 rated components are also perfect for gate or parking garage applications.

Ultra compact two button transmitters are built tough, with 100ft min. range (line of sight). A system kit is available, complete with (1) receiver and (2) two-button fobs.



ADVANCED  
TECHNOLOGY



HIGH  
SECURITY

### Features

#### CM-SRX2 Relay Receiver

- 868Mhz. high security rolling code, with 19 trillion combinations
- 2-channel receiver
- 1st relay momentary, 2nd relay momentary or latching operation
- 30 transmitter (fob) capacity
- Easy transmitter enrollment
- Built-in antenna
- IP65 rated weather-resistant enclosure
- Kit includes (1) receiver and (2) two-button fobs

#### CV-WTX2 Two Button Fob

- Ultra compact fob transmitters
- Rugged water-resistant construction
- 2-year battery life and low battery indication



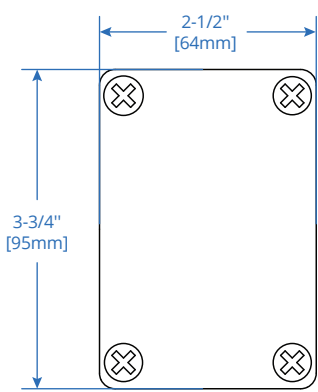
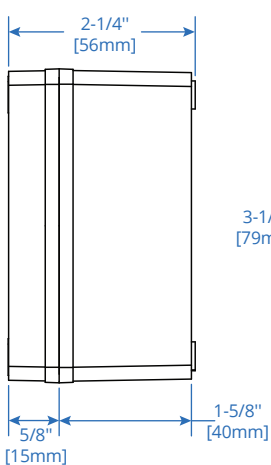
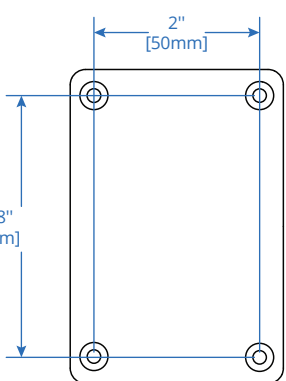
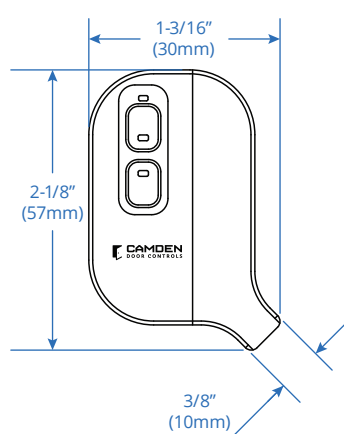
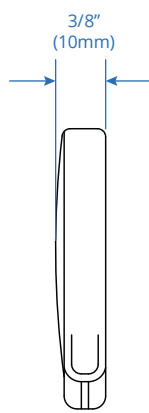
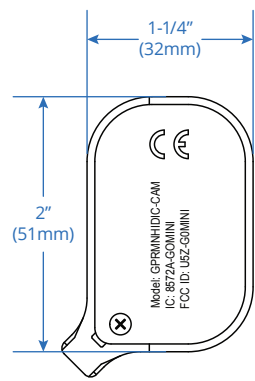
## SPECIFICATIONS

CM-SRX2 Relay Receiver	CV-WTX2 Two Button Fob
<p>Voltage: 12V or 24V AC/DC</p> <p>Frequency: 868.35Mhz.</p> <p>Current Draw (Max): 80mA</p> <p>Relay: (1) SPST, normally open, 1<sup>st</sup> relay momentary, 2<sup>nd</sup> momentary or latching/bi-stable, SPST normally closed, 1A @ 30 VDC</p> <p>Operating Temp: -4°F to 185°F (-20°C to +85°C)</p> <p>Dimensions: 2-1/2"W x 3-3/4"H x 2-1/4"D (64mm x 95mm x 56mm)</p>	<p>Voltage: 3 VDC, CR2032 type battery</p> <p>Current Draw: 12mA</p> <p>Operating Temp: -4°F to 131°F (-20°C to +55°C)</p> <p>Dimensions: 1-3/16"W x 2-1/8"H x 3/8"D (30mm x 57mm x 10mm)</p>

## ORDERING INFORMATION

CM-SRX2	2 channel 868 Mhz. wireless receiver
CV-WTX2	Ultra compact two-button key fob
CM-SRFM2	Secure wireless kit, includes (1) CM-SRX2 wireless receiver and (2) CV-WTX2 two-button key fobs

## DIMENSIONS

CM-SRX2 Relay Receiver	CV-WTX2 Two Button Fob
 <p><b>Front View</b></p>  <p><b>Side View</b></p>  <p><b>Back View</b></p>	 <p><b>Front View</b></p>  <p><b>Side View</b></p>  <p><b>Back View</b></p>



Opening New Doors to Innovation, Quality, and Support!

2395 Skymark Ave, Mississauga, ON Canada L4W 4Y6 • Toll Free: 1(877) 226-3369 (CAMDEN9)

Tel: (905) 366-3377 | Fax: (905) 366-3378 | E-mail: [info@camdencontrols.com](mailto:info@camdencontrols.com) | [www.camdencontrols.com](http://www.camdencontrols.com)



Certified ISO 9001:2015

Part #: MKTG-LIT-SP-CM-SR SERIES\_R3