

## CV-710SL

### SURFACE MOUNT ILLUMINATED WIEGAND KEYPAD



CV-710SL

#### FEATURES

- VANDAL RESISTANT BACKLIT METAL KEYS, FACEPLATE AND CAST ALUMINUM SURFACE BOX
- WEATHER RESISTANT IP-65 RATED
- SELECTABLE WIEGAND 26, 30, 34, 40 BIT OR CLOCK + DATA
- 12V DC OPERATION WITH LOW CURRENT DRAW
- SELECTABLE PIN CODE LENGTH
- TAMPER ALARM OUTPUT
- AUDIBLE AND VISUAL FEEDBACK
- 3 YEAR WARRANTY

#### DESCRIPTION

Camden Door Controls CV-710SL surface mount backlit Wiegand keypads are constructed to provide exceptional performance in high traffic/demanding applications, and support an unlimited number of users. Metal keys, faceplate and cast aluminum box are designed to withstand heavy traffic and vandalism. IP-65 rated dust and water resistance enable the keypad to be mounted outdoors. CV-710SL surface mount Wiegand keypads support selectable PIN code length and facility codes. A tamper switch alarm output is provided. There is a wide range of field selectable Wiegand outputs, providing compatibility with virtually any access control system.

#### APPLICATION

Camden Door Controls CV-710SL surface mount backlit Wiegand keypads are weather and vandal resistant, and are designed for heavy-duty indoor or outdoor applications. These keypads may be used as access control devices, wherever controlled entry or egress through an electrically locked door is required.

# SURFACE MOUNT WIEGAND KEYPAD


## ARCHITECTS/ENGINEERS SPECIFICATIONS

The surface mount Wiegand keypads used in the site/complex shall be Camden Door Controls model CV-710SL. The keypads shall be housed in a metal faceplate and enclosure, IP-65 rated against water and dust. Keys shall be metal with back lighting.

The keypads shall be Wiegand 26, 30, 34, 40 bit, and clock + data; have field selectable PIN code length, and provide audible and visual response to operation. A tamper alarm output shall be provided.

## SPECIFICATIONS

INPUT VOLTAGE:	12V DC
CURRENT CONSUMPTION:	30mA
OUTPUT:	WIEGAND 26, 30, 34, 40 BIT OR CLOCK + DATA
KEYPAD LIGHTING:	BACKLIT, SELECTABLE ON OR OFF
VISUAL INDICATOR:	RED, GREEN AND ORANGE LED
AUDIBLE INDICATOR:	ONE INTERNAL BUZZER
OPERATING TEMPERATURE:	-4°F TO 122°F (-20°C TO 70°C)
OPERATING HUMIDITY:	0 TO 95% (NON-CONDENSING)
RATING:	IP-65
DIMENSIONS:	3 1/2" W x 4 3/4"H x 1 9/16" D (90mm x 120mm x 40mm)

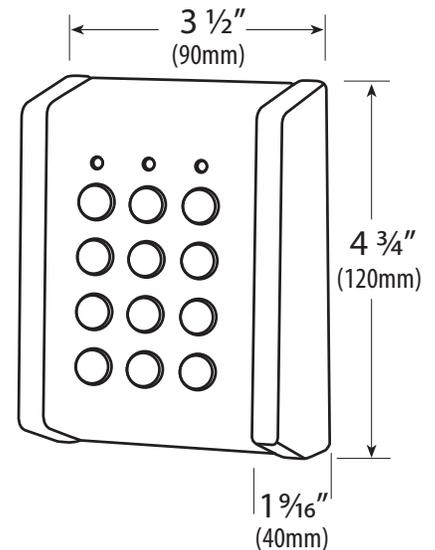

CV-710SL

## ORDER INFORMATION

MODEL	DESCRIPTION
CV-710SL	SURFACE MOUNT WIEGAND KEYPAD, WITH BACKLIT METAL KEYS AND CAST ALUMINUM MOUNTING BOX