



CM-550SK

CM-550SK

WEATHER/VANDAL RESISTANT DIGITAL KEYPAD (V2)

FEATURES


- IP68 RATED WATER/DUST RESISTANCE
- BACK LIT WITH ALL METAL CONSTRUCTION
- 2,000 USERS
- WIEGAND INPUT AND OUTPUT
- ADJUSTABLE DOOR OUTPUT TIME, ALARM TIME AND DOOR OPEN TIME
- TAMPER ALARM OUTPUT (LDR)
- DESIGNED FOR HIGH TRAFFIC APPLICATIONS
- WEATHER AND VANDAL RESISTANT DESIGN
- 3 YEAR WARRANTY

DESCRIPTION

Camden Door Controls CM-550SK is a heavy-duty stainless steel backlit keypad designed for indoor or outdoor use. With up to 1000 programmable user codes (relay #1) and 10 programmable user codes (relay #2), the keypad provides controlled access through electrically locked doors. All programming is done through the keypad, eliminating the need for computers or hand-held programmers. Programming information is held in non-volatile memory. The sealed metal keypad and case provides extreme resistance to vandalism and abuse.

APPLICATION

Camden Model CM-550SK is a weather resistant and vandal resistant digital backlit keypad, designed for heavy-duty indoor or outdoor applications. The keypad may be used as an access control device wherever controlled entry through a electrically locked door is desired. It may also be used for activating/deactivating machinery or equipment, overhead doors, automatic doors, or any other electrified device. Applications include offices, executive offices, computer rooms, engineering labs, equipment rooms, storage sites, etc.

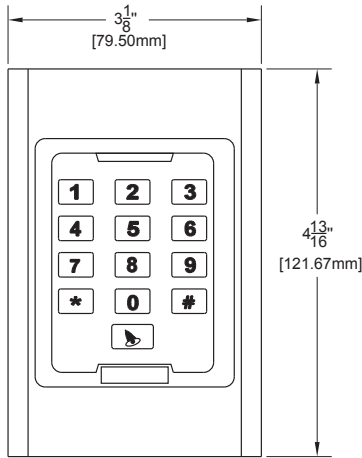

WEATHER/VANDAL RESISTANT DIGITAL KEYPAD (V2)

ARCHITECTS/ENGINEERS SPECIFICATIONS

The keypads to be used throughout the site/complex shall be Camden Door Controls model CM-550SK. The keypad shall have all metal construction and backlit keys. The keypad shall have a sealed metal faceplate and body, which is fully potted.


All programming shall be done through the keypad, and programming information stored in non-volatile EEPROM memory. The keypad shall have a minimum of 1000 + 10 user codes. There shall be a minimum of 2 relay outputs and a request-to exit input.

SPECIFICATIONS


INPUT VOLTAGE:	12/24V, AC/DC
IP RATING:	68
IDLE CURRENT:	25MA
CONTACT TYPE:	(1) FORM 'C'
CONTACT RATING:	1 AMP@30VDC
ALARM OUTPUT LOAD:	1 AMP@30VDC
RING BELL LOAD:	1 AMP@30VDC
OPERATING TEMPERATURE:	-49°F TO 113°F (-45°C TO 55°C)
DIMENSIONS:	4 13/16" H x 3 1/8" W x 1 1/16" D (121.67mm x 79.50mm x 26.42mm)

ORDERING INFORMATION

MODEL	DESCRIPTION
CM-550SK	1,000 USERS, SURFACE MOUNT, (2) FORM 'C' RELAYS, 12/24V DC

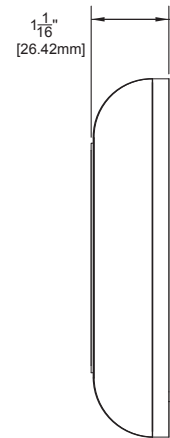

SIDE VIEW

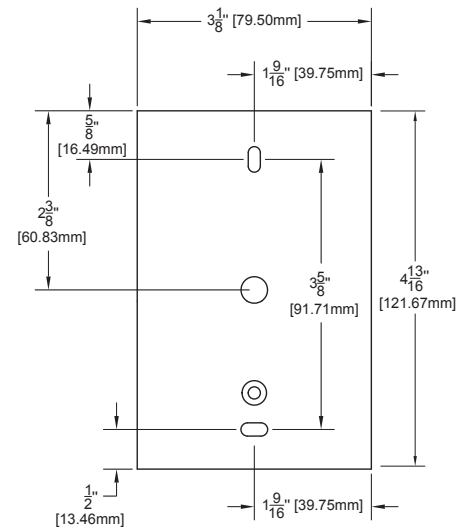

BACK VIEW