




CX-ED1579L 'All In One' Fire Rated Electric Strike





CX-ED1579L Grade 1 fire rated 'all in one' electric strike offers 'Universal' performance with six stainless steel faceplates, field selectable voltage, fail safe/fail secure operation, and latch bolt monitor included.

CX-ED1579L is UL security and 3-hour fire rated, non-handed, and compatible with most mortise and cylindrical locksets. In addition, it features adjustable latch monitor placement and easy-fit wiring connectors for power and monitoring.

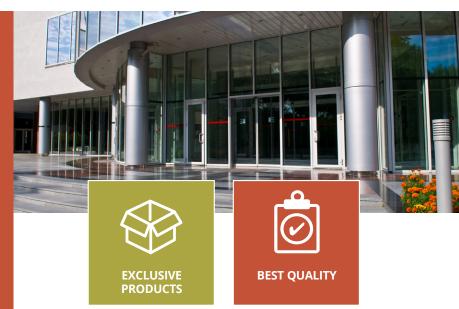

Features

- For mortise and cylindrical locksets
- 3/4" (19mm) latch projection (throw)
- 6 stainless steel faceplates included
- Faceplates also available in black architectural finish (BHMA 622, US19)
- Selectable fail safe/fail secure operation
- Selectable 12/24V AC/DC
- · Built-in latch monitoring
- Non-handed, LH/LR
- Easy fit connectors for power and monitoring wires
- Stainless steel strike body
- 5 year warranty
- BHMA certified A156.31

SPECIFICATIONS

Voltage: 12/24V AC/DC

Current Draw: 260mA @12V AC/DC

150mA @24V AC/DC

Static Strength: 1,500 lbs.

Dynamic Strength: 70 ft-lbs.

Mode: Field Selectable Fail Safe

or Fail Secure

Operation: AC Buzz, DC Silent
Duty: Continuous (DC)
Mounting: Non-handed

Endurance: 1,500,000 Cycles (Factory Tested)

250,000 Cycles (UL Verified)

Fire Rating: UL10C/CAN4-S104 3hrs.


(Fail Secure Mode Only)


Latch Bolt Monitor: SPDT, 100mA @ 24V DC

Dimensions: 4-7/8"H x 1-1/4"W x 1-3/4"D

(124mm x 32mm x 45mm)

DIMENSIONS Side Front 1-1/4" (32mm) \bigcirc 4-1/8" (105mm) 3-3/8" (86mm) 3-1/8" (80mm) 4-7/8" (124mm) 3/16" 5/8' (5mm) (16mm) Top 1-5/8" (41mm) 1-3/4 (45mm) 0

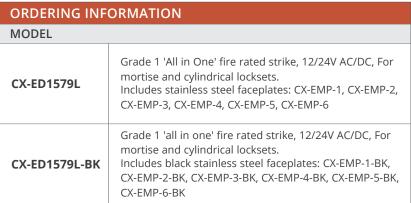

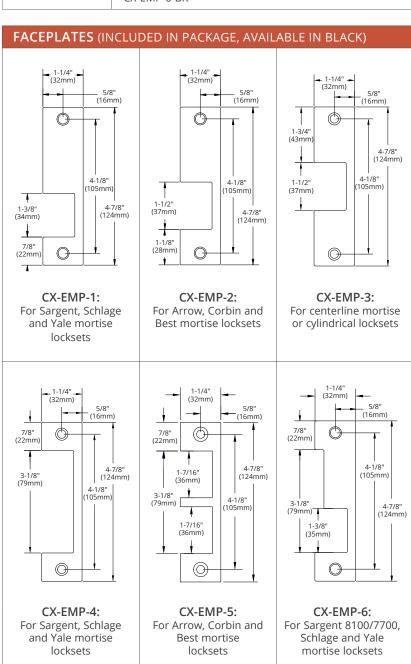



Opening New Doors to Innovation, Quality, and Support!

