

CX-EPD0009 Magnetic Cabinet Lock



Camden CX-EPD0009 Magnetic Cabinet Lock has an ultra-compact design and is an easily installed high-security lock for virtually any enclosure door, including computer cabinets, refrigerators, lockers, and retail display counters. This 12V or 24V magnetically operated lock has a holding force of 440 lbs. (200 kg) and is water-resistant, making it ideal for humid environments, including inside fridges and freezers.



EXCLUSIVE
PRODUCTS



BEST VALUE



RUGGED
CONSTRUCTION

Features

- Front or side mounting for use with swing or sliding doors and drawers
- Armature plate adjusts to door alignment
- Water resistant for indoor and outdoor use
- Ultra-compact design
- 440 lbs. (200 kg) holding force
- 5 lbs. preload



SPECIFICATIONS

POWER INPUT:	12 / 24 VDC
CURRENT DRAW:	60mA @ 12VDC, 110mA @ 24VDC
ENDURANCE:	250,000 Cycles
STATIC STRENGTH:	440 lbs. (200 kg) Holding Force
PRELOAD:	5 lbs.
TEMPERATURE RATING:	-4°F to 140°F (-20°C to 60°C)
OPERATION MODE:	Fail-Safe
TEMPERATURE RATING:	-4°F to 140°F (-20°C to 60°C)

OPERATION MODE:	Fail-Safe
INSTALLATION OPTIONS:	Front Mount, Side Mount
DIMENSIONS*:	CX-EPD0009: 2-1/2" H x 27/32" W x 1-1/4" D (64mm x 21.5mm x 31.6mm) *Dimensions are of assembled product
	Cover Plate: 2-1/2" W x 1" H 1/16" D (64mm x 25mm x 1mm)
	Stud Plate: 2-1/2" W x 1" H 5/16" D (64mm x 25mm x 8mm)
	L Bracket: 2-1/2" W x 1-3/32" H x 1-1/4" D (64mm x 25mm x 1mm)
	Z Bracket: 2-1/2" W x 3" H x 1-5/8" D (64mm x 76mm x 41mm)



ORDERING INFORMATION

MODELS


CX-EPD0009	Magnetic Cabinet Lock
CX-CL-LZBRK	L & Z Bracket for use with CX-EPD0009 Magnetic Cabinet Lock
CX-CL-GLMNT	Glass Mount Kit for use with CX-EPD0009 Magnetic Cabinet Lock

DIMENSIONS


CABINET LOCK

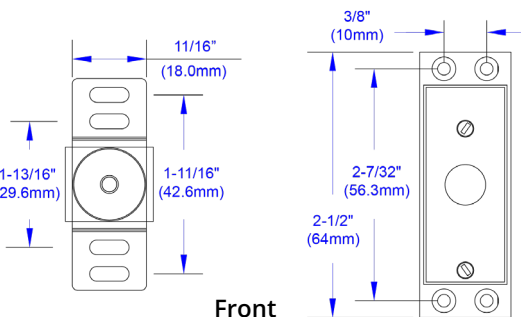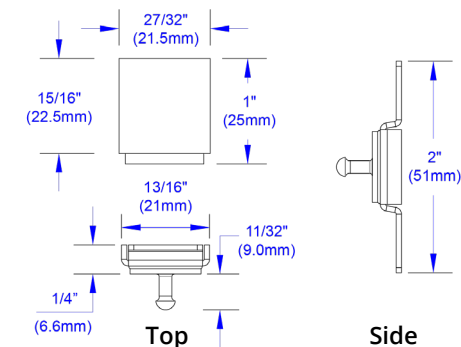

L BRACKET

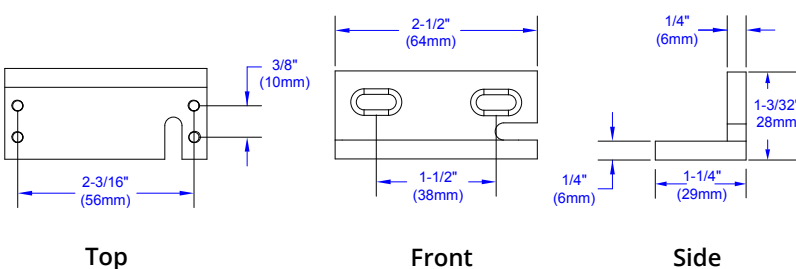


Z BRACKET

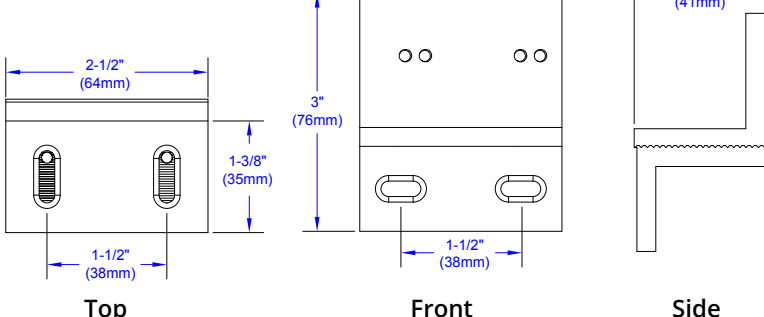


GLASS MOUNT KIT

STUD PLATE

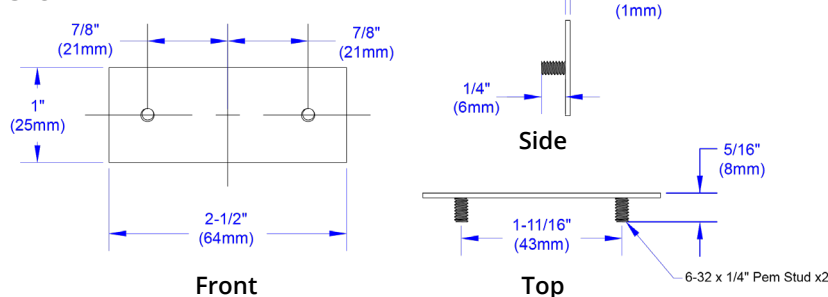

COVER PLATE

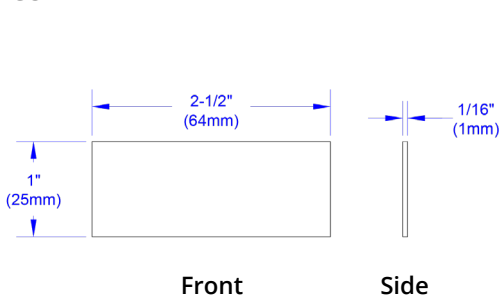

Opening New Doors to Innovation, Quality, and Support!

2395 Skymark Ave, Mississauga, ON Canada L4W 4Y6 • Toll Free: 1(877) 226-3369 (CAMDEN9)
Tel: (905) 366-3377 | Fax: (905) 366-3378 | E-mail: info@camdencontrols.com | www.camdencontrols.com



Part #: MKTG-LIT-SP-CX-EPD0009_R1