



CM-60

6" ROUND ALL-ACTIVE SWITCHES



CM-60/2



CM-60/3



CM-60/4

FEATURES

- LARGE, EASY TO OPERATE SWITCHES
- 6" ROUND
- ALL-ACTIVE DESIGN REQUIRES MINIMAL ACTUATION FORCE
- DURABLE STAINLESS STEEL OR SOLID BRASS CONSTRUCTION
- MEETS ADA REQUIREMENTS
- FLUSH MOUNT OR SURFACE MOUNT
- UL/CSA APPROVED SPDT MOMENTARY SWITCH, RATED 15 AMPS @ 30V DC
- VARIOUS LOGOS & MESSAGES
- ARCHITECTURAL FINISHES

DESCRIPTION

Camden Door Controls CM-60 Series all-active switches are heavy-duty, ADA-compliant door controls. The 6" round faceplates are stainless steel or solid brass, and the assembly is designed for easy installation in single-gang electrical boxes, or, with included adapter plate – double-gang and 4x4 boxes. The SPDT and optional DPDT switches are UL/CSA approved, and rated 15 amps @ 30 VDC.

APPLICATION

Camden all-active switches are designed for areas where an easy-to-activate, high-visibility switch is desired. Ideal for high-traffic areas, hospitals, wheelchair access, seniors' residences, etc. They can be surface or flush mounted.

Camden all-active switches are designed to control electric strikes, electromagnetic locks and automatic doors. They may also be used for shunting, bypassing alarms, request to exit, timed functions and many other applications.

The switches are made for high frequency usage, for both indoor and outdoor environments. Camden switches are versatile, and can be supplied in various configurations and finishes, to suit any commercial, industrial or residential application.

ARCHITECTS / ENGINEERS SPECIFICATIONS

The switches to be used throughout the complex shall be Camden Door Controls CM-60 all-active switches.

The switches shall be easy-to-activate, ADA compliant and 6" round in diameter. Switches shall be all-active, whereby pressing any part of the faceplate will activate the device. Faceplates shall be constructed of 18-gauge stainless steel or solid brass, and have concealed mounting screws for tamper resistance. Switches shall use plastic spacers and rubber dampers for noise reduction. Switches shall be rated at a minimum of 15 amps @ 30 VDC.

Their design shall allow mounting in single-gang electrical boxes, or, with included adapter plate – double-gang and 4x4 boxes.

6" ROUND ALL-ACTIVE SWITCHES

SPECIFICATIONS

VOLTAGE:	12/24V AC/DC
CONTACT TYPE:	SPDT FORM 'C'
CONTACT RATING:	15A @ 30VDC
SWITCH TYPE:	MOMENTARY
DIMENSIONS:	6"DIA. x 1 1/8"D (1152mm x 29mm)
STD. FINISH:	US32/C32D














ORDERING INFORMATION

All CM-60 series all-active switches are complete ready-to-install assemblies. They are supplied with stainless steel Allen screws and Allen wrench for mounting.

MODEL	DESCRIPTION
CM-60	6" ROUND PUSH PLATE SWITCH

OPTIONS (Add suffix to model above)

FACEPLATE GRAPHIC OPTIONS

				
CM-XX/1	CM-XX/2	CM-XX/2AL	CM-XX/2AR	CM-XX/3
				
CM-XX/3F	CM-XX/4	CM-XX/4AL	CM-XX/4AR	CM-XX/4F
			NOTE: /2, /2AL, /2AR, /4, /4AL, /4AR, /4F: Blue and /3, /3F, /8, /8D /8F: Black	
CM-XX/8	CM-XX/8D	CM-XX/8F		

ARCHITECTURAL FINISHES:


AB	ADD AB TO PRODUCT # FOR ANTIQUE BRASS FINISH (US5/C5)
PB	ADD PB TO PRODUCT # FOR POLISHED BRASS FINISH (US3/C3)
SB	ADD SB TO PRODUCT # FOR SATIN BRASS FINISH (US4/C4)
OB	ADD OB TO PRODUCT # FOR OIL RUB BRONZE FINISH (US10B/C10B)

WEATHERPROOF OPTIONS:


CM-XXX-WT	ADD 'WT' TO PRODUCT # FOR BOOT AND WATER TIGHT COATING
CM-XXX-WR	ADD 'WR' TO PRODUCT # FOR WEATHER RESISTANT BOOT

CONTACT OPTIONS:

DP	ADD DP TO PRODUCT # TO ORDER DPDT SWITCH INSTEAD OF SPST SWITCH (USE SPECIAL MOUNTING PLATE/TEMPLATE)
----	---

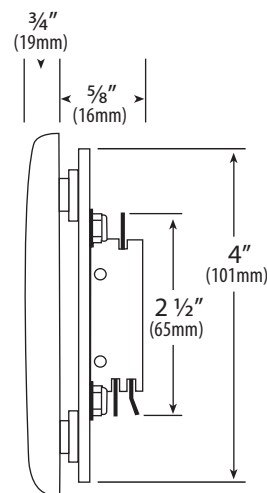

CM-60

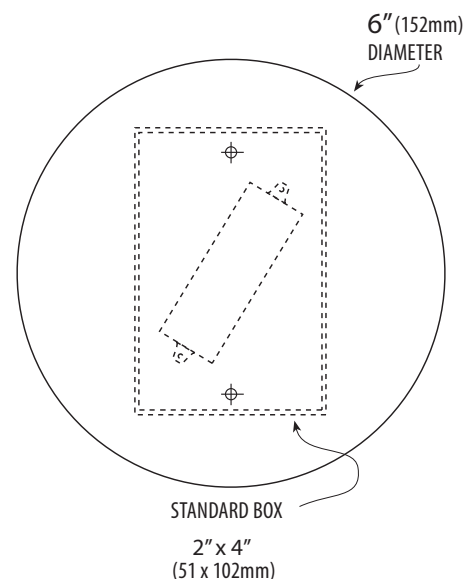

CM-60