

SECURITY *

LISTED
BP10200

CX-ED2071/ED2079

'UNIVERSAL' LOW PROFILE GRADE 2
ELECTRIC STRIKES

GRADE

2

CX-ED2079 AND
STAINLESS STEEL FACEPLATES

FEATURES


- CENTERLINE LATCH ENTRY, FOR CYLINDRICAL LOCKSETS
- 1/2" - 5/8" (13MM - 16MM) LATCH PROJECTION
- DUAL VOLTAGE 12/24V AC/DC
- FIELD SELECTABLE FAIL SAFE/FAIL SECURE OPERATION
- HORIZONTAL ADJUSTABILITY OF STRIKE BODY
- LOW PROFILE STRIKE BODY
- 3 STAINLESS STEEL FACEPLATES INCLUDED:
 - ANSI SQUARE 4 7/8" X 1 1/4" (124MM x 32MM)
 - ANSI ROUND 4 7/8" X 1 1/4" (124MM x 32MM)
 - WOOD DOOR 7 15/16" X 1 7/16" (202MM x 37MM)
- 5 YEAR WARRANTY

DESCRIPTION

Camden CX-ED2071 low profile grade 2 ANSI electric strike for cylindrical locksets provides exceptional value for installations that require 8 - 16V AC/DC operation. CX-ED2071 includes 3 faceplates, selectable fail safe/fail secure operation and horizontal adjustment of the strike body.

Camden CX-ED2079 low profile 'Universal' grade 2 ANSI electric strike for cylindrical locksets provides exceptional value with 3 faceplates, and selectable 12/24V AC/DC voltage, fail safe/fail secure operation and horizontal adjustment of the strike body.

APPLICATION

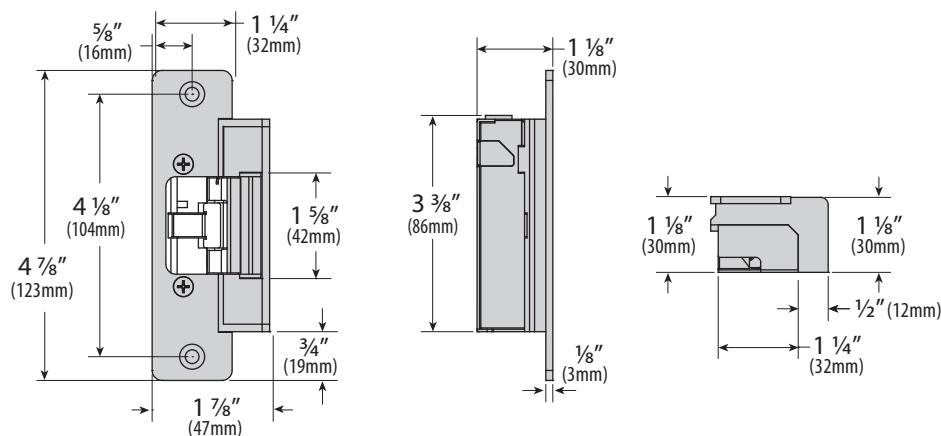

DOOR FRAME TYPES

HOLLOW
METAL
FRAMEWOOD
FRAMEALUMINUM
FRAMECYLINDRICAL
LOCKSET

COMPATIBLE LOCKSETS

CX-ED2071 & CX-ED2079 'UNIVERSAL' LOW PROFILE GRADE 2 ELECTRIC STRIKES

SPECIFICATIONS

VOLTAGE:	CX-ED2071: 8 - 16V, AC/DC CX-ED2079: 12/24V, AC/DC
CURRENT DRAW:	CX-ED2071: 305MA@8VDC, 625MA@16VDC 190MA@8VAC, 460MA@16VAC CX-ED2079: 300MA @12VDC, 150MA@24VDC
STATIC STRENGTH:	1,000 LBS.
DYNAMIC STRENGTH:	50 FT. LBS.
ENDURANCE:	700,000 CYCLES
MODE:	SELECTABLE FAIL SAFE FAIL SECURE
OPERATION:	AC - BUZZ DC - SILENT
DUTY:	CX-ED2071: INTERMITTENT CX-ED2079: CONTINUOUS
MOUNTING:	NON-HANDED
DIMENSIONS:	3 3/8" H x 1 7/8" W x 1 1/8" D (86mm x 47mm x 30mm)

ORDERING INFORMATION

CX-ED2071:	'UNIVERSAL' ELECTRIC STRIKE, 8 - 16V AC/DC, FAIL SAFE/FAIL SECURE OPERATION, HORIZONTAL ADJUSTMENT, C/W 3 STAINLESS STEEL FACEPLATES (CX-ESP1B, ESP2B & ESP 4B)
CX-ED2079*:	'UNIVERSAL' ELECTRIC STRIKE, 12/24V AC/DC, FAIL SAFE/FAIL SECURE OPERATION, HORIZONTAL ADJUSTMENT, C/W 3 STAINLESS STEEL FACEPLATES (CX-ESP1B, ESP2B & ESP 4B)


FACEPLATES

INCLUDED IN PACKAGE

MODEL	DESCRIPTION
CX-ESP1B	ANSI Square, 4 7/8" x 1 1/4", square corners
CX-ESP2B	ANSI Round, 4 7/8" x 1 1/4", rounded corners
CX-ESP4B	Wood Door, 7 7/8" x 1 3/8", rounded corners

ADDITIONAL FACEPLATE


MODEL	DESCRIPTION
CX-ESP3B	Hollow Metal Door, 6 7/8" x 1 1/4", stainless steel

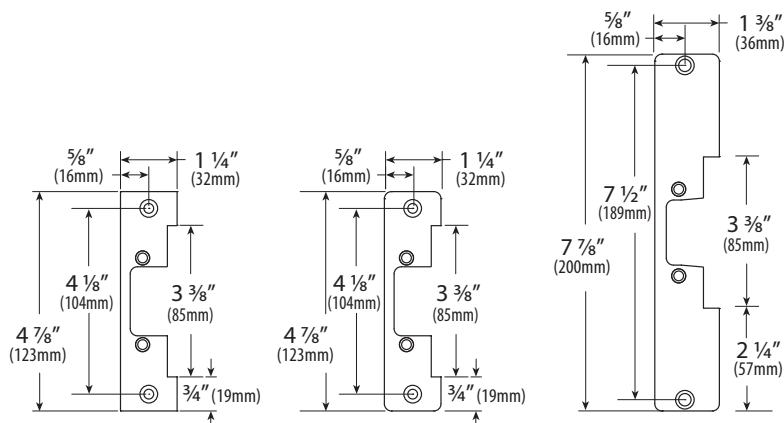

ESP1B - ANSI SQUARE

ESP2B - ANSI ROUND

ESP4B - WOOD DOOR

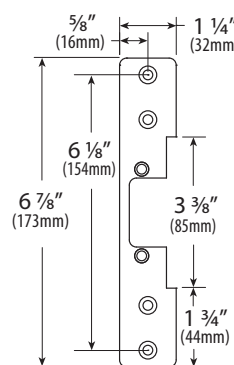

ESP3B - HOLLOW METAL DOOR

LIP EXTENSION BRACKETS

CX-ED-LIP1:	1" LIP EXTENSION FOR ANSI STRIKES
CX-ED-LIP2:	2" LIP EXTENSION FOR ANSI STRIKES