


CX-1000/75 MINIMINDER



CX-1000/75

FEATURES

- ADJUSTABLE DELAY FROM 1-15 SECONDS
- ULTRA COMPACT DESIGN
- 12/24 V DC
- SPDT CONTACTS RATED AT 2 AMPS @ 30V DC
- ACCEPTS N/O DRY INPUTS
- MOUNTING: SUPPLIED WITH DOUBLE-SIDED FOAM TAPE
- TURN POTENTIOMETER CLOCK-WISE TO INCREASE TIME; COUNTER CLOCK-WISE TO DECREASE TIME

DESCRIPTION

Camden Door Controls CX-1000/75 MiniMinder Is a basic easy-to-operate delay on release timer. The delay is adjustable from 1 to 15 seconds, and is accessed by a potentiometer on the board. The Form C relay output is rated at 2 amps @ 30V DC. The input must be a momentary dry contact such as a push or exit switch.

APPLICATION

The MiniMinder is ideal for (de) energizing an electric strike or electromagnet for an adjustable time period. It is also suitable for automatic door operators that do not have built in time delays.

The compact design makes the relay ideal for installations where space is at a premium, for example within the switch box itself.

ELECTRIC STRIKES

MAGNETIC LOCKS

DOOR ALARMS

RELAYS & TIMERS


POWER SUPPLIES

TRANSFORMERS

ANNUNCIATORS

RESTROOM CONTROL KITS

TYPICAL APPLICATION

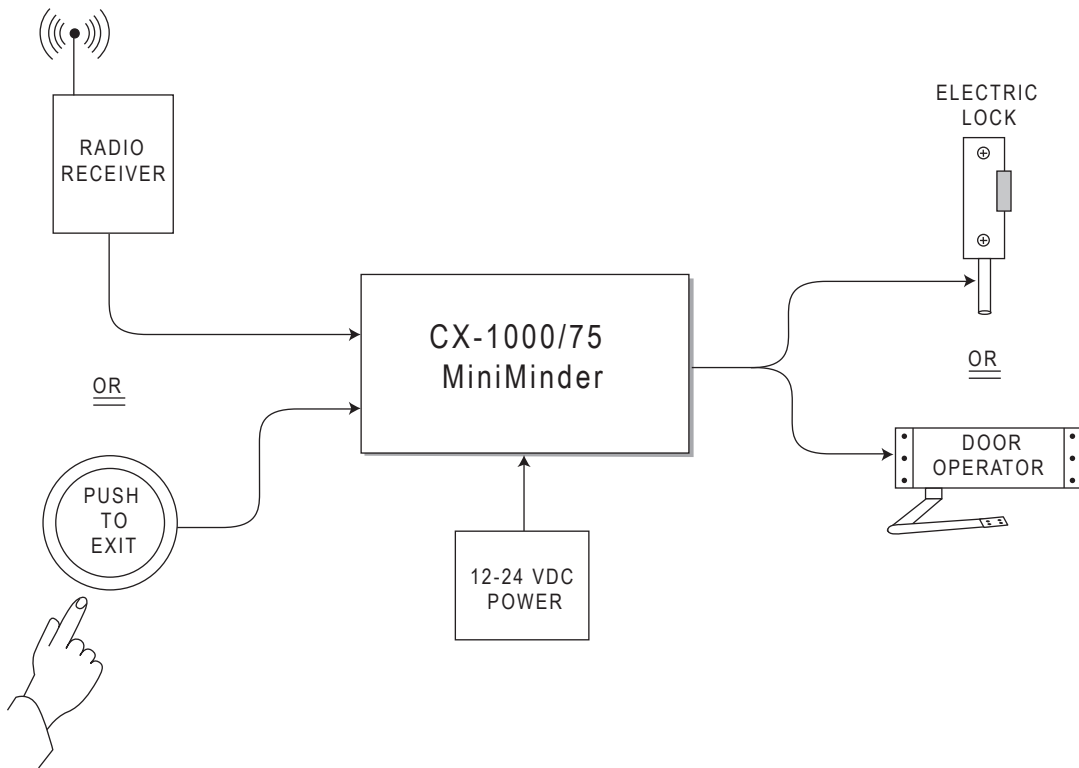

SPECIFICATIONS

OPERATING VOLTAGE:	12/24 V DC
ENCLOSURE:	NONE
CURRENT DRAW:	10 MA IDLE, 40 MA OPERATING
RESPONSE TIME:	0.3 SECONDS
INPUT:	N/O DRY CONTACT
RELAY OUTPUT:	FORM 'C' (SPDT)
CONTACT RATING:	2 A @ 30V DC
ELECTRICAL LIFE:	100,000 @ RATED CAPACITY
TIME DELAY:	1 - 120 SECONDS
DIMENSIONS:	1 5/8" H x 29/32 W" W x 3/4" D (41mm x 23mm x 19mm)
MOUNTING:	DOUBLE SIDED FOAM TAPE

