


## CX-EPD0009 Magnetic Cabinet Lock



Camden CX-EPD0009 Magnetic Cabinet Lock has an ultra-compact design and is an easily installed high-security lock for virtually any enclosure door, including computer cabinets, refrigerators, lockers, and retail display counters. This 12V or 24V magnetically operated lock has a holding force of 440 lbs. (200 kg) and is water-resistant, making it ideal for humid environments, including inside fridges and freezers.

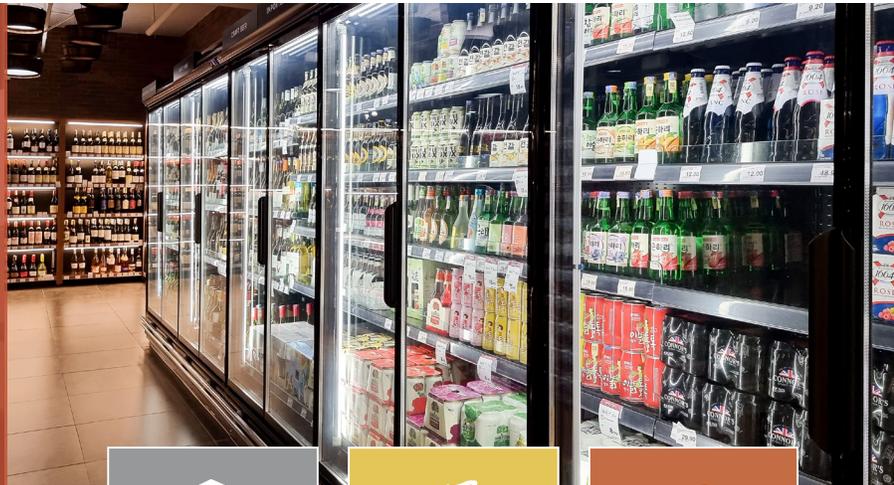

EXCLUSIVE  
PRODUCTS



BEST VALUE



RUGGED  
CONSTRUCTION

### Features

- Front or side mounting for use with swing or sliding doors and drawers
- Armature plate adjusts to door alignment
- Water resistant for indoor and outdoor use
- Ultra-compact design
- 440 lbs. (200 kg) holding force
- 5 lbs. preload



## SPECIFICATIONS

POWER INPUT: 12 / 24 VDC  
 CURRENT DRAW: 60mA @ 12VDC, 110mA @ 24VDC  
 ENDURANCE: 250,000 Cycles  
 STATIC STRENGTH: 440 lbs. (200 kg) Holding Force  
 PRELOAD: 5 lbs.  
 TEMPERATURE RATING: -4°F to 140°F (-20°C to 60°C)  
 OPERATION MODE: Fail-Safe  
 TEMPERATURE RATING: -4°F to 140°F (-20°C to 60°C)

OPERATION MODE: Fail-Safe  
 INSTALLATION OPTIONS: Front Mount, Side Mount  
 DIMENSIONS\*: **CX-EPD0009**: 2-1/2" H x 27/32" W x 1-1/4" D (64mm x 21.5mm x 31.6mm)  
*\*Dimensions are of assembled product*  
**Cover Plate**: 2-1/2" W x 1" H x 1/16" D (63.5mm x 25.4mm x 1.6mm)  
**Stud Plate**: 2-1/2" W x 1" H x 1/4" D (63.5mm x 25.4mm x 6.4mm)  
**L Bracket**: 2-1/2" W x 1-3/32" H x 1-1/4" D (64mm x 25mm x 1mm)  
**Z Bracket**: 2-1/2" W x 3" H x 1-5/8" D (64mm x 76mm x 41mm)


## ORDERING INFORMATION

### MODELS


CX-EPD0009	Magnetic Cabinet Lock
CX-CL-LZBRK	L & Z Bracket for use with CX-EPD0009 Magnetic Cabinet Lock
CX-CL-GLMNT	Glass Mount Kit for use with CX-EPD0009 Magnetic Cabinet Lock

## DIMENSIONS


### CABINET LOCK

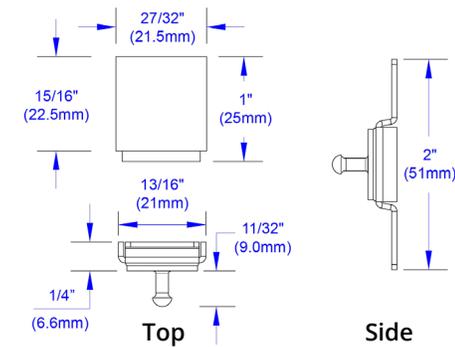

### L BRACKET

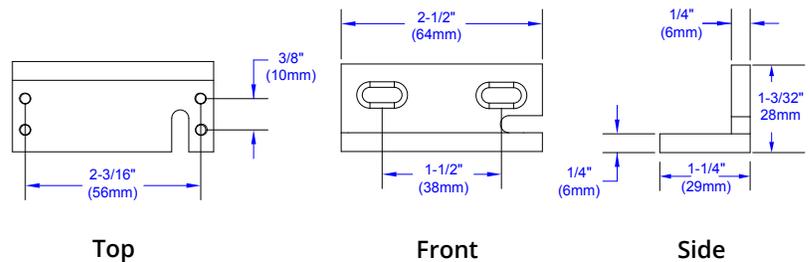


### Z BRACKET

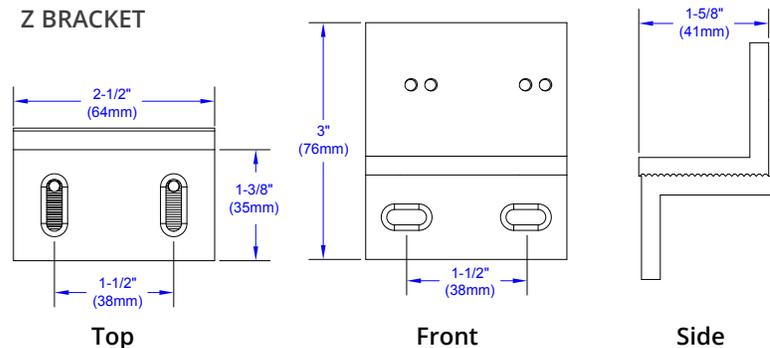

### GLASS MOUNT KIT

#### STUD PLATE

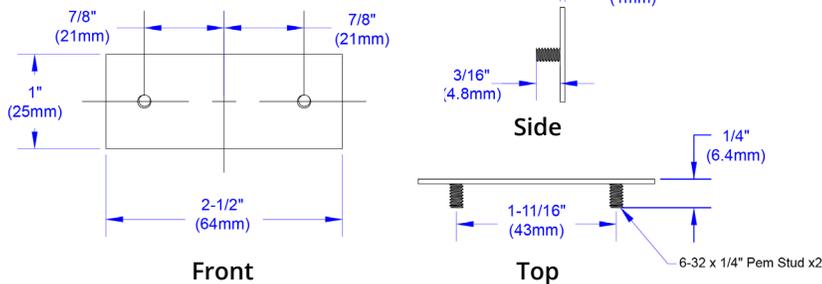

#### COVER PLATE

