

**LOCKING PRODUCTS** 

## CX-ED1579L: 'ALL IN ONE' GRADE 1 FIRE RATED ELECTRIC STRIKE



\$49.00



CX-ED1579L Grade 1 electric strike for mortise and cylindrical locksets offers the best strike quality and features, with the added value of built-in latch monitoring, five stainless steel faceplates and 'Universal' performance, including field selectable voltage and fail safe / fail secure operation.

## **Features**

- · For mortise and cylindrical locksets
- 3/4" (19mm) latch projection (throw)
- · Selectable fail safe / fail secure operation
- Selectable 12/24V AC/DC
- · 5 Stainless Steel faceplates included
- · Non-handed, LH / RH
- · Easy fit connectors for power & monitoring wires
- · Latch monitoring
- · Stainless steel strike body

	• 5 year warranty		
MODELS List Price			
CX-ED1579L	Grade 1 'All In One' Fire Rated Strike, 12/24V AC/DC, for mortise & cylindrical locksets, c/w 5 stainless steel faceplates	\$650.00	
CX-ED1579L-BK	Grade 1 'All In One' Fire Rated Strike, 12/24V AC/DC, for mortise & cylindrical locksets c/w 5 black faceplates	\$722.00	
FACEPLATES List Price			
Stainless Steel Finish (BHMA 630, US32D)			
CX-EMP-1	Stainless faceplate for Sargent, Schlage & Yale Mortise Locksets	\$23.00	
CX-EMP-2	Stainless faceplate for Arrow, Corbin, & Best mortise locksets	\$23.00	
CX-EMP-3	Stainless faceplate for centerline mortise or cylindrical locksets	\$23.00	
CX-EMP-4	Stainless faceplate for mortise locksets with deadbolt	\$27.00	
CX-EMP-5	Stainless faceplate for all mortise locks that include both latch & deadbolt	\$27.00	
Black Finish (BHMA 622, US19)			
CX-EMP-1-BK	Black faceplate for Sargent, Schlage & Yale Mortise Locksets	\$35.00	
CX-EMP-2-BK	Black faceplate for Arrow, Corbin, & Best mortise locksets	\$35.00	
CX-EMP-3-BK	Black faceplate for centerline mortise or cylindrical locksets	\$35.00	
CX-EMP-4-BK	Black faceplate for mortise locksets with deadbolt	\$49.00	




## **Specifications**

Voltage:	12/24V AC/DC
Current Draw:	260mA @ 12V AC/DC 150mA @ 24V AC/DC
Static Force:	1,500 Lbs.
Dynamic Force:	70 Ft- Lbs.
Mode:	Fail-safe / Fail-secure Field selectable
Operation:	AC - Buzz DC - Silent
Duty:	Continuous (DC)
Mounting:	Non-Handed
Endurance:	1,500,000 Cycles (Factory Tested) 250,000 Cycles (UL Verified)
Fire Rating:	UL10C / CAN4-S104 3 hrs. (Fail Safe)
Latch Bolt Monitor:	SPDT, 100mA @ 24V DC
Dimensions:	<b>Body:</b> 4-7/8"H x 1-1/4"W x-1 3/4"D (124mm x 32mm x 45mm)

## Stainless Steel Faceplates

Black faceplate for all mortise locks that include both latch & deadbolt

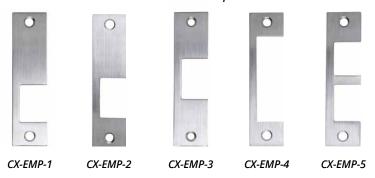

CX-EMP-5-BK