


## CM/CV-626/634


### PIEZO KEYPADS



CM-634

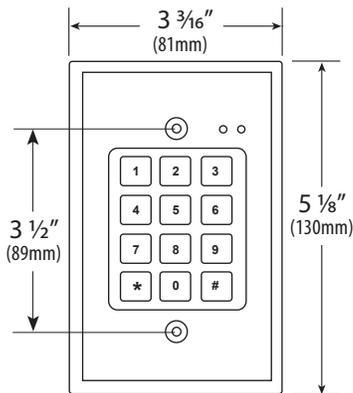

CM-634

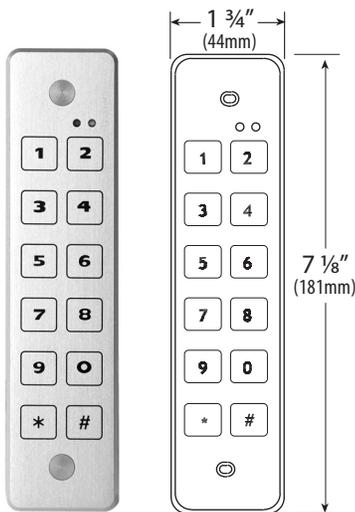

CM-626

#### FEATURES

- ONE-PIECE ALUMINUM HOUSING
- HEAVY-DUTY FORM C RELAY
- 200 USER CODES, 100 MILLION COMBINATIONS
- ANODIZED GRAPHICS NEVER WEAR OFF
- STANDALONE OR WIEGAND OUTPUT
- NO MOVING PARTS
- VISUAL AND AUDIBLE FEEDBACK DURING PROGRAMMING
- WATER PROOF (IP68 RATED)
- EEPROM MEMORY
- VANDAL PROOF

#### DESCRIPTION

Camden Door Controls CM/CV-626/634 Series Piezo keypads are constructed using a patented one-piece design with no moving parts. These fully sealed keypads are capable of 200 users for the standard units, while the Wiegand output models support unlimited users. The anodized graphics never wear off and the one-piece aluminum housing provides protection against water, weather and vandalism. LED's provide visual feedback and there is an audible confirmation of the key presses. There are various models for either single gang or doorjamb mounting. These keypads provide an extremely rugged solution to your access control applications.

#### APPLICATION

Camden Door Controls CM/CV-626/634 Piezo keypads are weatherproof, vandal proof, and are designed for heavy-duty indoor and outdoor applications. These keypads may be used as access control devices wherever controlled entry through an electrically locked door is required.

These series of keypads may be used for activating/deactivating machinery or equipment, overhead doors, automatic doors, or any other electrical device. Applications include offices, executive offices, computer rooms, engineering labs, equipment rooms, storage sites, and institutional use (prisons, hospitals, schools, etc.)

KEY SWITCHES

PUSH BUTTONS

MOUNTING OPTIONS

RF CONTROLS

HANDS-FREE SWITCHES

SPECIAL PURPOSE SWITCHES

KEYPADS

ACCESSORIES


## ARCHITECTS/ENGINEERS SPECIFICATIONS

All keypads to be used throughout the site/complex shall be weatherproof and vandal proof. The keypads shall incorporate a non-moving, one-piece design. Piezo crystals shall be used to provide the key press signal. No wires shall be soldered directly to the Piezo crystals. Keypads shall be manufactured out of aluminum. Keypads shall incorporate buzzers for audible confirmation of key input. All keypads shall be either single gang or jamb mounted.

All programming shall be done through the keypad (except the Wiegand models), and programming information stored in the non-volatile EEPROM memory. The keypad shall have a minimum of 200 user codes.

## SPECIFICATIONS

INPUT VOLTAGE:	12 VAC/VDC OR 24 VDC
OUTPUTS:	FORM C OR WIEGAND (8 OR 26 BIT)
TEMPERATURE:	-40°F TO 257°F (-40°C TO 125°C)
DIMENSIONS:	JAMB WIDTH: 7 1/8" H x 1 3/4" W x 15/16" D (181mm x 44mm x 23mm)
	SINGLE GANG: 5 1/8" H x 3 3/16" W x 13/16" D (130mm x 81mm x 21mm)

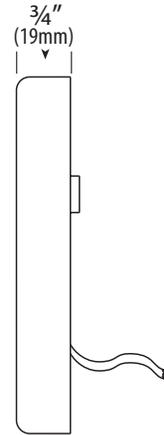

CM-634

## ORDERING INFORMATION

### PIEZO – SELF CONTAINED (ONE PART)

MODEL	MAX. USER	MOUNTING	OUTPUTS	VOLTAGE	OUTDOOR	ILLUMINATED
CM-626S	200	SURFACE, JAMB	1 FORM C	12 VAC, 12-24 VDC	YES	NO
CM-634	200	SURFACE, SINGLE GANG	1 FORM C	12 VAC, 12-24 VDC	YES	NO

### PIEZO – WIEGAND OUTPUT

CV-626SW	UNLIMITED	SURFACE, JAMB	26 BIT WIEGAND	12-24 VDC	YES	NO
CV-6268W	UNLIMITED	SURFACE, JAMB	8 BIT WIEGAND	12-24 VDC	YES	NO
CV-634W	UNLIMITED	SURFACE	26 BIT WIEGAND SINGLE GANG	12-24 VDC	YES	NO